


Fusion

Perforated or Non-Perforated
Ceiling & Wall Panels

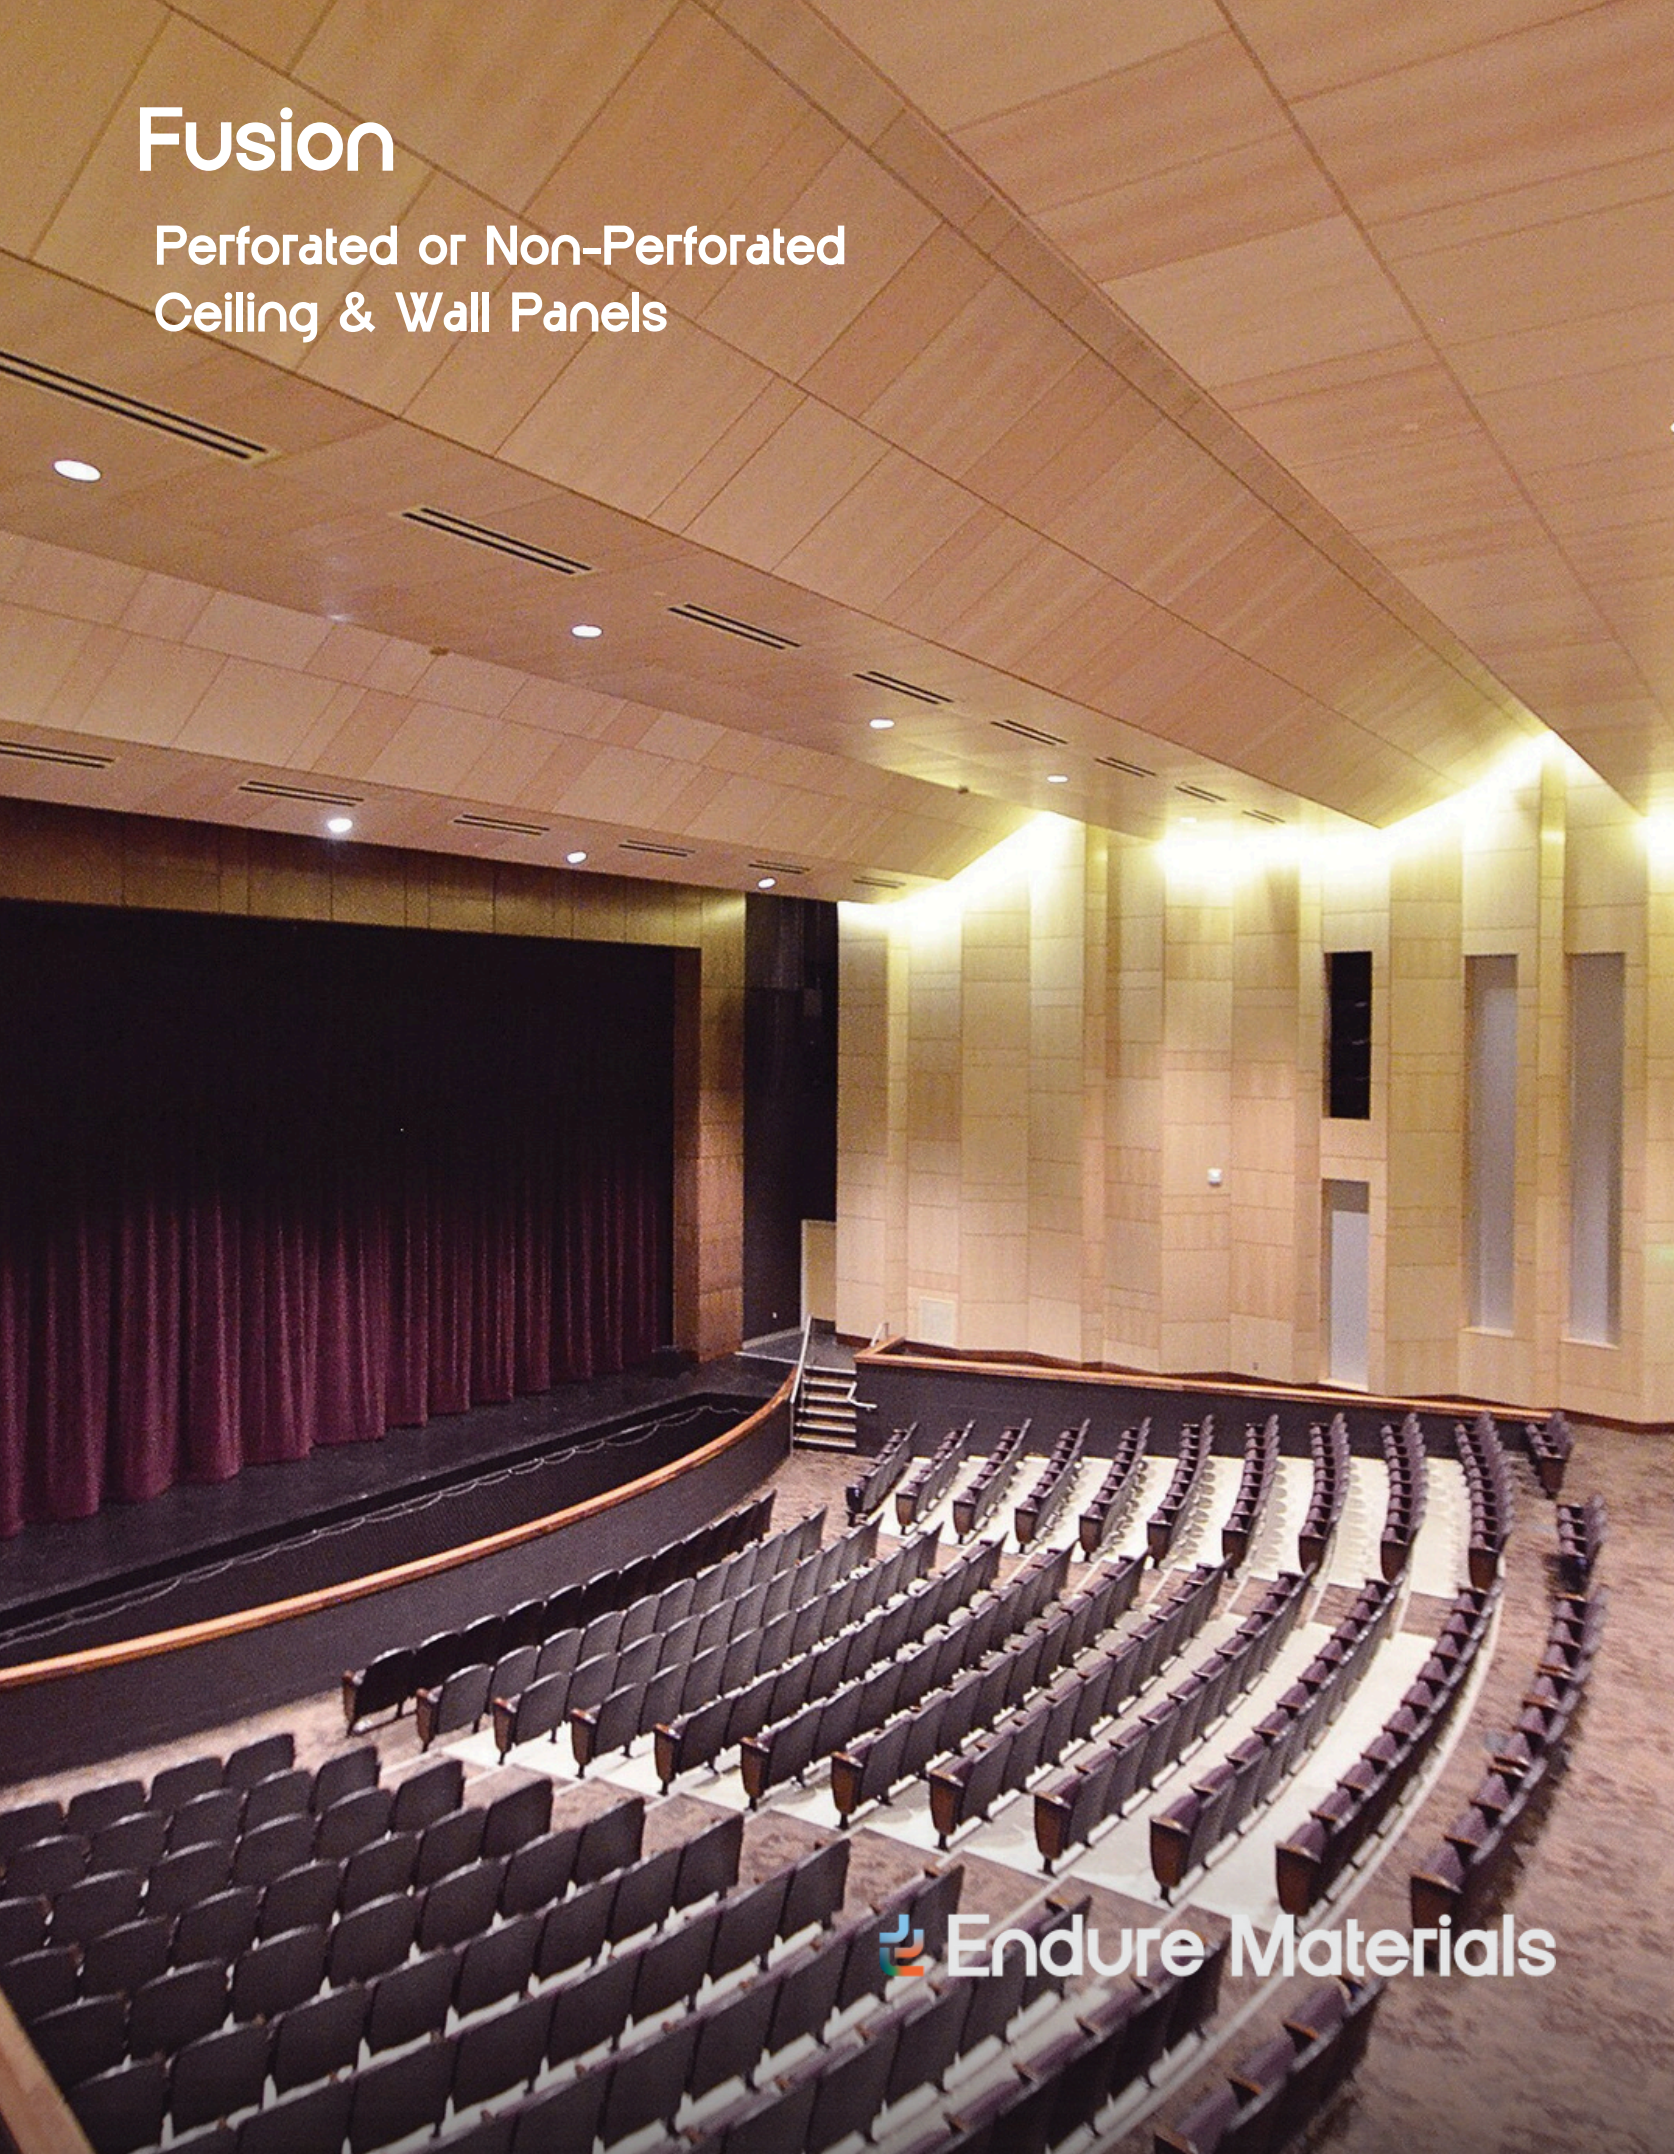

Endure Acoustics

Fusion

Perforated or Non-Perforated Ceiling & Wall Panels

Fusion acoustic ceiling and wall panels feature a wood-veneer face, either in flat panels or with a variety of perforation options.


Standard perforations are available in 4mm, 6mm, and 8mm diameter holes spaced 16mm or 32mm on center in both square and diamond patterns.

Custom diameter, spacing, and patterns are available, as well as slotted designs.

For projects requiring sound absorption, acoustical backer may be installed above Fusion ceiling or behind Fusion wall panels.

SIZES

3/4" thickness 2' x 2', 2' x 4', 2' x 6', 2' x 8'
(nominal) Available in custom sizes up to 4' x 8'

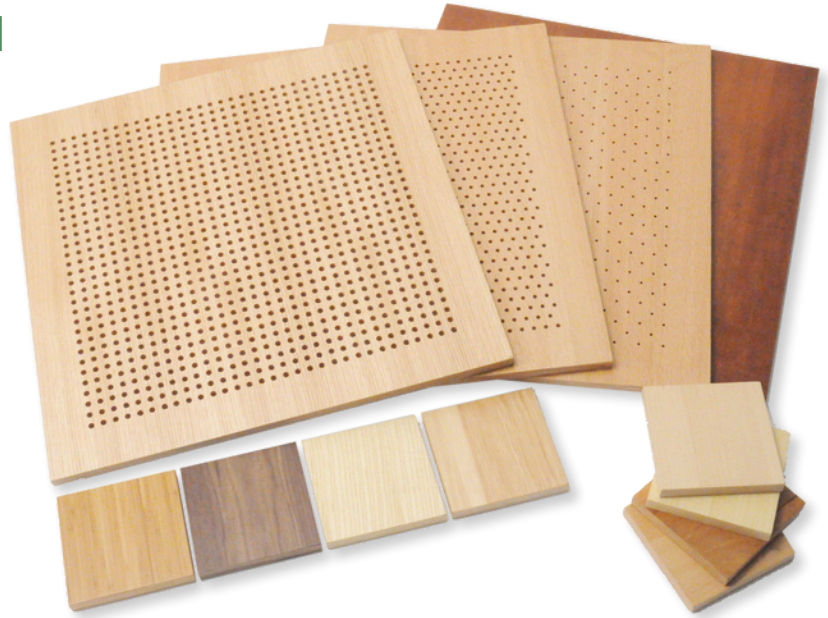

FEATURES

APPEARANCE & COLOR

Standard perforations in 4mm, 6mm, and 8mm diameter
Slotted and custom perforations available
Perforation spacing: 16mm and 32mm O.C., typical square or diamond pattern, or slotted patterns
FSC available
May contribute LEED® projects
Finishes: Clear lacquer top coat or stained to match

CORE

Class A Fire Rated Particle Board
Class A Fire Rated MDF

ACOUSTICAL ABSORPTION

Acoustically absorptive when perforated:
NRC varies based on the hole pattern
Soundtex applied to back of perforated panels for acoustical absorption
Optional features for sound control:
Acoustical backer available in 1" and 2"

MOUNTING OPTIONS

Ceilings: Lay-in or tegular lay-in; torsion spring
Walls: Z-clip / Z-bar

MODULARS



WOOD SPECIES



Ash

Maple

Beech

Walnut

Red Oak

White Oak

Hickory

Cherry

*Natural wood products vary in color and grain. Due to differences in printing, actual color may differ from images above.



Planet-Approved. Engineered to Last.™

endurematerials.com 866-631-2221

