

Liteback® Collection Rigid Core SPC Click

Size: 9" x 72"

Wear Layer: 20 mil

Texture: Registered Embossment

Thickness: 5.5 mm (+ 1 mm Underlayment)

Bevel: 4 Sided Micro Bevel

15-year Commercial Warranty when installed per EndureFloors guidelines

Liteback® technology: less weight, freight, and less raw material.

GreenGuard certification, assuring your IAQ

5G Climb®, install the floor on the wall.

5G Dry® gives the product a waterproof installation



Tacoma
Hard Smoked



Sonoma
Medium Smoke



Sanibel
Warm White



New Haven
Light Natural



Napa
Frosty White




Milton
Weathered Grey



Canton
Smoked Grey



Austin
Driftwood

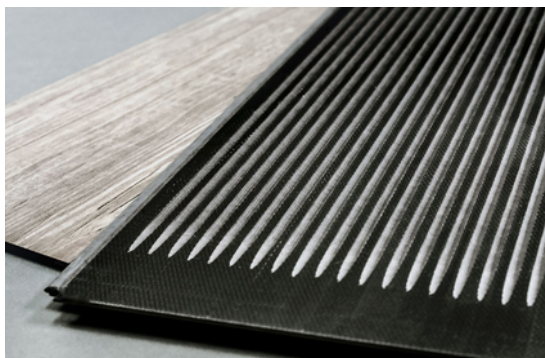

Packaging Data

Pieces /Carton	5
Sq. Ft. /Carton	22.46
Cartons /Pallet	48
Sq. Ft. /Pallet	2304
Pallets /Container	18
Sq. Ft. /Container	19,405.44

Acoustic Data

STC	54
IIC	55
HIIC	61

Description	Result
ISO4918	Caster Test: Pass
ASTM E648 Critical Radiant Flux of Floor Covering Systems	Meets or exceeds Class 1 rating as specified in NFPA Life Safety Code 101 and IBC 804.2 Classification
ASTM E662 Smoke Density	Passes 450 or less
ASTMF137 Flexibility of Resilient Flooring Materials	Passes 6mm Mandrel
ASTMF925 Resistant to Chemicals	Pass
ASTMF1514 Measuring Heat Stability (7 days)	Met <8.0 Delta E
ASTMF1515 Measuring Light Stability for Color Change	Resistant to Light-Pass DCO 247 Static CoEfficient >0.6
ASTMF1914 Short Term Indentation	Residual Indentation No puncture
ASTMF2199 Dimensional Stability After exposure to heat	Length - 0.008" / 12" (-0.07%) Width 0.013" / 12" (-0.11%)
ASTMF2055 Size Tolerance	0.016"/linear ft.
ASTMF410 Wear Layer Thickness	Requirement: Commercial 0.02 Test Result: 0.011" / .26mm



Planet-Approved. Engineered to Last.™

endurematerials.com 866-631-2221