

Luxe XL 5.5 Collection Waterproof SPC Click

Size: 9" x 60"

Wear Layer: 20 mil

Texture: Deep Registered Embossment

Thickness: 5.5 mm (Quiet Step Cushioned attached)


Tested: on a concrete floor assembly, 5 stories and up

Indoor Sound Transmission: IIC 68

15-year Commercial Warranty when installed per EndureFloors guidelines

ArmourGuard Microbead Technology ensures for extreme scratch resistance


Floorscore certification, contributing to a healthy IAQ
Commercial Grade Waterproof Flooring




Reclaimed




Sunset



Yosemite



Sequoia



Vineyard



Morning Dew




Glacier



Yellowstone



Shenandoah

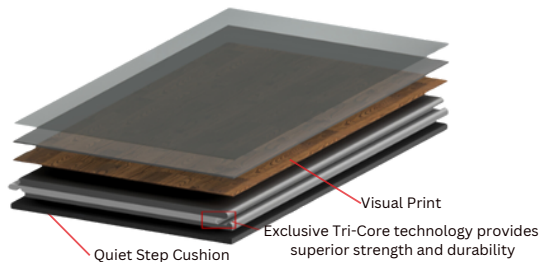

Packaging Data

Pieces /Carton	7
Sq. Ft. /Carton	27
Cartons /Pallet	60
Sq. Ft. /Pallet	1575



Description	Result
ASTMF386	Pass
ASTMF970 Static Load Limit	Pass
ASTMF137 Flexibility of Resilient Flooring Materials	Passes 6mm Mandrel
ASTMF925 Resistant to Chemicals	Pass
ASTMF1514 Measuring Heat Stability (7 days)	Met <8.0 Delta E
ASTMF1515 Measuring Light Stability for Color Change	Met <8.0 Delta E
ASTMF1914 Short Term Indentation	Residual Indentation at 40 lbs - 0.015" (7.78%)
ASTMF2199 Dimensional Stability after exposure to heat	Length - 0.008" / 12" (-0.07%) X Width 0.013" / 12" (-0.11%)
ASTMF2055 Squareness	Pass
ASTMF2055 Size Tolerance	Pass
Certified Low Emitting Product	Meets Guidelines



Planet-Approved. Engineered to Last.™

endurematerials.com 866-631-2221