

Furrow 3mm Glue Down LVP

Size: 9" x 48", 7.25" x 48"

Wear Layer: 20 mil

Texture: Embossed in Register Texture

Thickness: 3mm (Intended for 1st floor installations)

15-year Commercial Warranty

per EndureFloors installation guidelines

Embossed Registered Texture

Floorscore certification, contributing to a healthy IAQ



Carmella Oak



Beech Oak



Vienna Grey




Vienna Maple



Pierre Oak




Iberian Maple



Magellan



Kenneth Maple

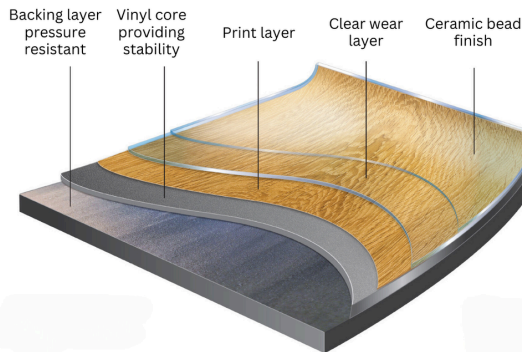

Packaging Data

Sq. Ft. /Carton	48
Cartons /Pallet	48
Sq. Ft. /Pallet	2304
Pallets /Container	20
Sq. Ft. /Container	46,080



CERTIFIED BY
SCS Global Services

Description	Result
ASTMF1700-ASTMF2055, ASTMF386, ASTMF410, ASTMF2055, ASTMF1914, ASTMF137, ASTMF2199, ASTMF925, ASTMF2199, ASTMF1515, ASTMF1514, Certificate of Compliance	Pass
ANSI 137 dynamic Co-efficient of Friction	Average DCOF .44
ASTM E648 Critical Radiant Flux of Floor Covering Systems	Meets or exceeds Class 1 rating as specified in NFPA Life Safety Code 101 and IBC 804.2 Classification
ASTM E662 Smoke Density	Passes 450 or less
ASTMF137 Flexibility of Resilient Flooring Materials	Passes 6mm Mandrel
ASTMF925 Resistant to Chemicals	Pass
ASTMF1514 Measuring Heat Stability (7 days)	Met <8.0 Delta E
ASTMF1515 Measuring Light Stability for Color Change	Met <8.0 Delta E
ASTMF1914 Short Term Indentation	Residual Indentation at 40 lbs - 0.015" (7.78%)
ASTMF2199 Dimensional Stability after exposure to heat	Length - 0.008" / 12" (-0.07%) X Width 0.013" / 12" (-0.11%)
ASTMF2055 Size Tolerance	.016"/linear ft.
ASTMF410 Wear Layer Thickness	Requirement: Commercial .02 Test Result: .011" / .26mm
Certificate of Compliance	Max 1/3 of Flat Surface Area/Test Result: Pass



Planet-Approved. Engineered to Last.

endurematerials.com 866-631-2221